

STAINLESS STEEL BRAIDED LEAD PROTECTION



FIG. F

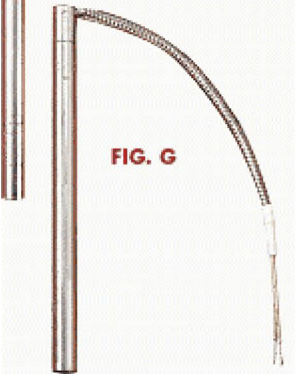


FIG. G

Swaged-in double conductor stainless steel braid is internally connected for strength and full length flexibility. See chart below for the additional dimension the Mighty Watt Plus Figure F and Figure G adds to the sheath length of stock items. For non-stock single conductor braided lead protection, specify Figure H for straight exit, Figure J for right angle. When ordering non-stock Fig. F, G, H or J items, specify the overall sheath length. 14" high temperature (850° F/450° C) leads with 12" braid is standard. Specify additional length.

Non-Stock Braided Lead Protection		
Dia.	Minimum Unheated*	
	Fig. F/H	Fig. G/J
1/8"	--	--
1/4"	1"	1"
5/16"	1"	1"
3/8"	1-1/2"	1-1/2"
1/2"	1-1/2"	1-1/2"
5/8"	1-9/16"	1-9/16"
3/4"	1-7/8"	1-7/8"
15/16"	1-7/8"	1-7/8"
1"	1-7/8"	1-7/8"
1-1/4"	1-7/8"	1-7/8"

* At lead end. Standard cold sections can be increased. Consult **GT** for metric diameter dimensions.

2 Day Shipment Mighty Watt Plus Braided Lead Protection		
Dia.	Adds to Length	
	Fig. F	Fig. G
1/4"	1/2"	9/16"
3/8"	1/2"	9/16"
1/2"	1/2"	5/8"
5/8"	1/2"	5/8"
3/4"	1/2"	5/8"

Add 3/8" to above dimension for total cold section at lead end.

Ordering Number Example:

From Current Stock List:
 1/2" x 5-3/4" 1000W 240V
 MWEJ05N0116
 Add 24" Fig. F Leads
 MWEJ05N0116-F2
 (overall length now 6-1/4")
 Using the same item, add 60"
 Fig. G leads
 MWEJ05N0116-G5
 (overall length now 6-3/8")